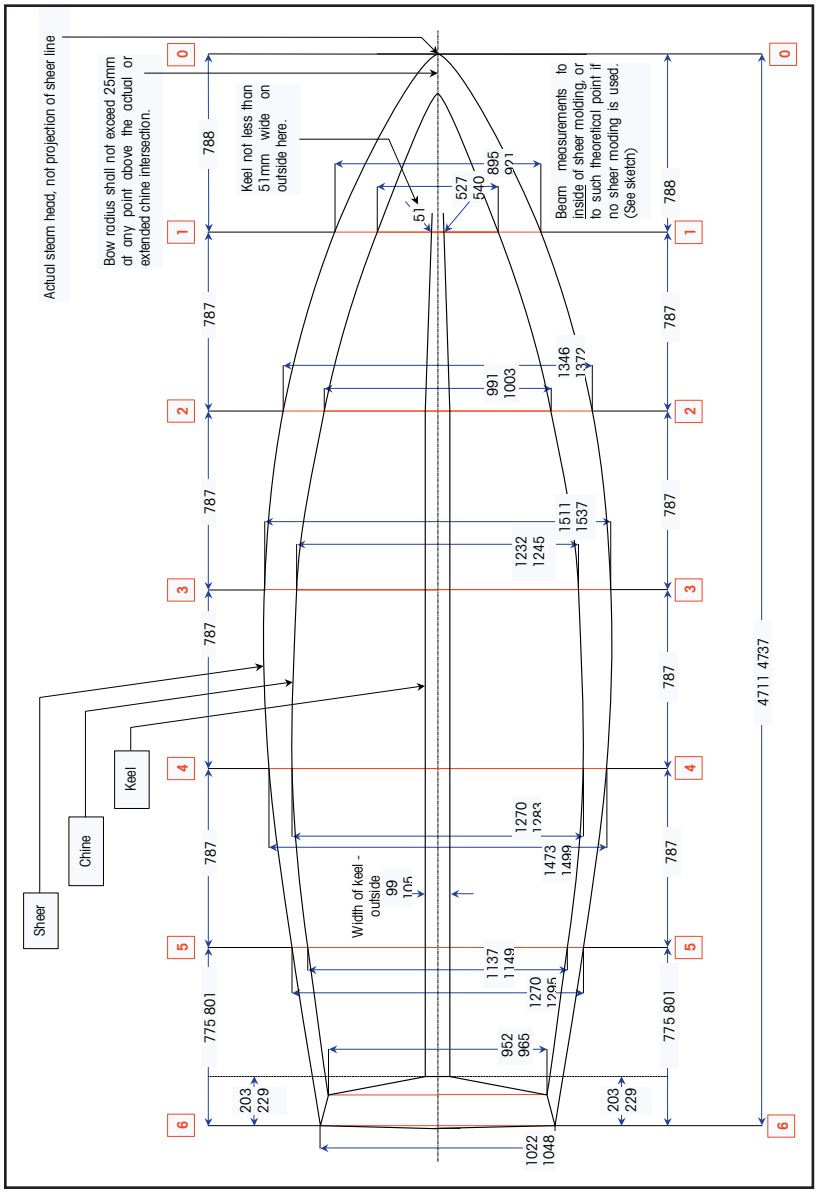
Actual steam head, not projection of sheer line
Bow radius shall not exceed 25mm at any point above the actual or extended chine intersection.
Keel not less than 51mm wide on outside here.
Beam measurements to inside of sheer molding, or to such theoretical point if no sheer moding is used. (See sketch)
Sheer
Chine
Keel
Width of keel - outside
99
105
51
527
540
895
971
991
1003
1346
1372
1232
1245
1511
1537
1270
1283
1473
1499
1137
1149
1270
1295
952
965
1022
1048
788
787
787
787
787
787
787
787
775 801
775 801
203
229
203
229
4711 4737
0
1
2
3
4
5
6