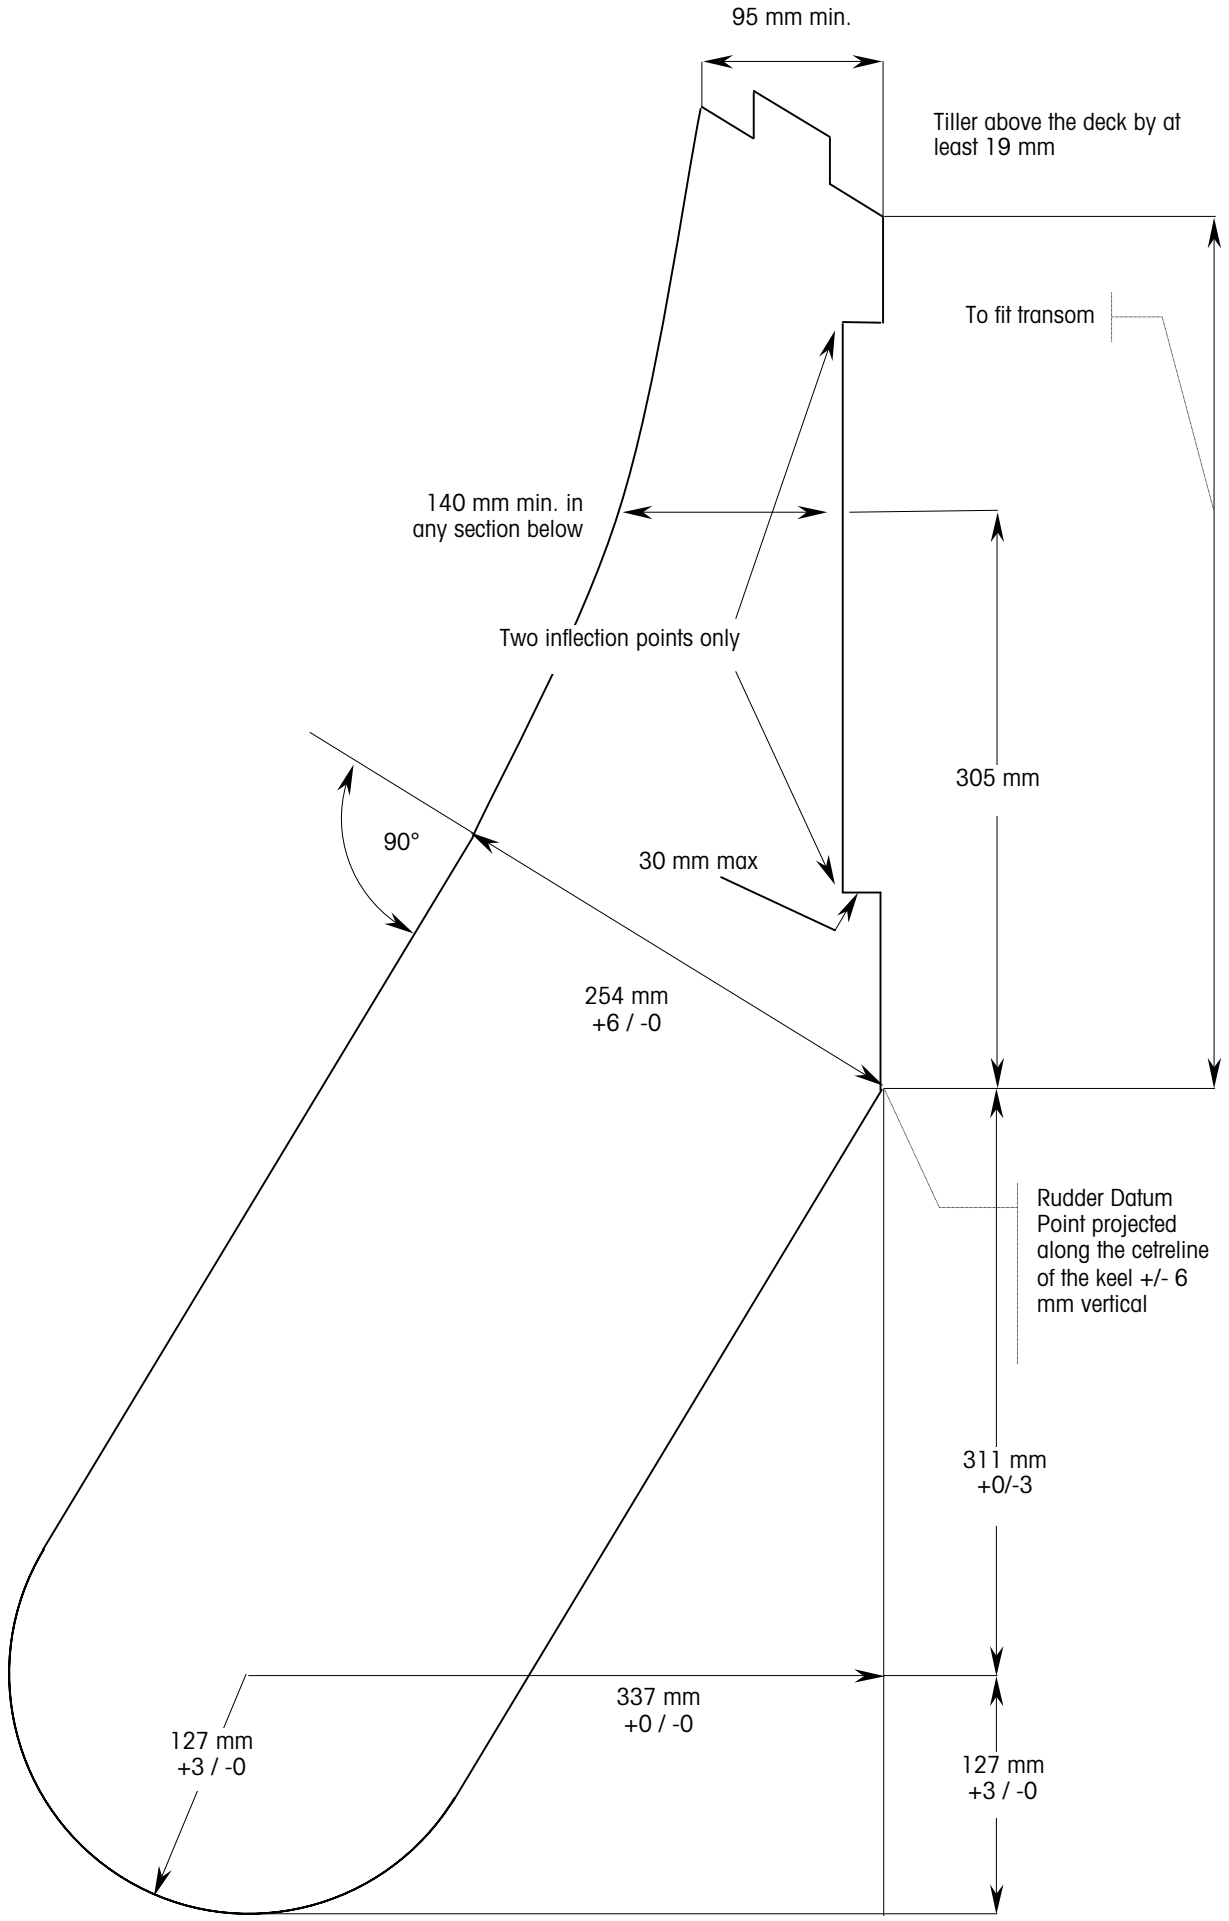
95 mm min.
Tiller above the deck by at least 19 mm
To fit transom
140 mm min. in any section below
Two inflection points only
305 mm
90°
30 mm max
254 mm
+6 / -0
Rudder Datum Point projected along the cetreline of the keel +/- 6 mm vertical
311 mm
+0/-3
337 mm
+0 / -0
127 mm
+3 / -0
127 mm
+3 / -0